

Digital temperature / humidity transmitter MH8D46C with double analog output V or mA

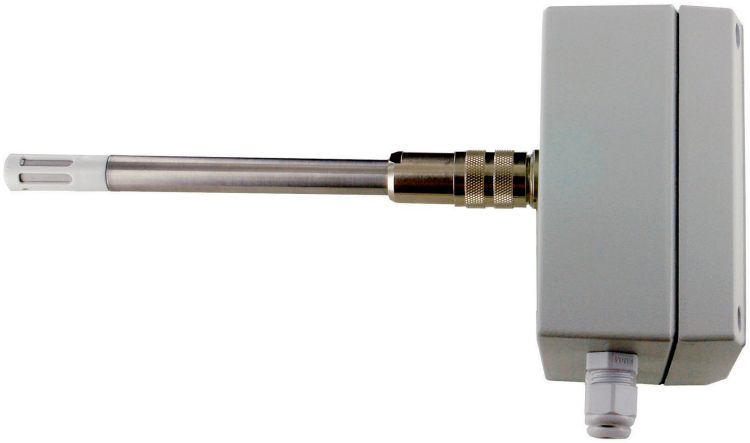

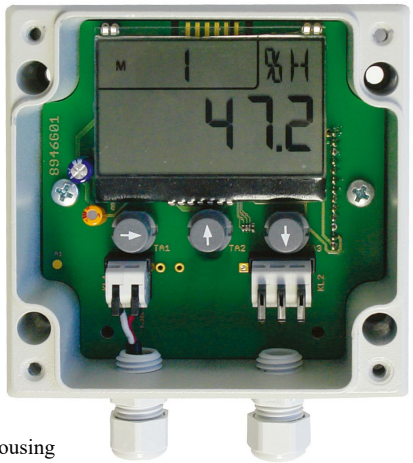


Transmitter
with open housing

- Digital sensor element for humidity, temperature, air pressure All key sensor characteristics, settings, and adjustment data are saved in the sensor element itself.
- Plug-in sensor element: Spare elements are inexpensive; a replacement can be fitted on site quickly and easily by virtually anyone; it will be fully accurate straight away needing no special adjustment.
- Digital transfer of measured values from the sensor element to the transmitter
- Four climate variables can be measured: Double analog output for temperature and one humidity variable relative humidity / dewpoint / mixture ratio. The air pressure dependent humidity values are automatically compensated for air pressure (the air pressure is measured directly at the measuring point in the sensor tip).
- The transmitters can be configured via the internal display and the keypad.
- The analog output type (10 V or 20 mA) can be selected (via the keypad); the analog output range can be programmed.
- Display of measured value, channel, units, humidity range, analog start, analog end, and analog type
- The sensor tube can be connected either directly by plugging onto the transmitter itself or via a connecting cable.
- Suitable for conduit mounting or wall mounting


Technical data

Operative range	Sensor -20 to +80 °C, 5 to 98 % RH Electronics -10 to +50 °C, IP65
Humidity sensor	
Measuring range	0 to 100 % RH
Sensor	CMOSens® technology
Fixed measuring period / output period	approx. 3 seconds
Accuracy	±3 % RH in range 10 to 90 % RH
(incl. hysteresis)	±5 % RH in range 5 to < 98 % RH at nominal temperature
Hysteresis	typical ±1 % RH
Nominal temperature	+23 °C ±5 K
Sensor operating pressure	Atmospheric pressure
Response time T_{63}	typical 8 seconds at +25 °C, 1 m/s (without filter)
Temperature sensor	
Sensor	CMOSens® technology
Fixed measuring period / output period	approx. 3 seconds
Accuracy	typical ±0.2 K at 5 ... 60 °C max. ±0.4 K at 5...60 °C max. ±0.7 K at -20...80 °C
Reproducibility	typical ±0.1 K
Response time T_{63}	typical 20 seconds (without filter)
Outputs	
Double analog output	Digital-to-analog converter (DAC) electr. isol. 0 to 10 V, load >100 kilohms 0 to 20 mA, load <500 ohms
Output type	0 to 10 V, 0 to 20 / 4 to 20 mA, selectable
Resolution	16 bit
Accuracy	0.1 % of final value
Temperature drift	10 ppm / K
Time constant	100 µs
Connection	Cable, via screwless clamp connector, with cable bushing Cable diameter 2 to 5 mm
Standard equipment	
Display, internal	2-row LCD 7 segments 4 1/2 and 5 characters 2 digits 16 segments
Operation, internal	3 keys
Power supply	
DC voltage	9 to 30 VDC
Current consumption	37 mA + 1.5·IOut
Connection	Cable, via screwless clamp connector, with cable bushing Cable diameter 2 to 5 mm
Mechanical design	
Sensor tube	Stainless steel, diameter 12 mm
Protective cap	SK7, metal-mesh filter
Housing	Die-cast aluminum, closed cover
Dimensions	100 x 100 x 60 mm (LxWxH)
Protective class	IP65 (with sensor tube and connecting cable plugged in)


Display of measured values and programming (housing open)




Measured value display, channel M0, temperature




Measured value display, channel M1, humidity variable, e.g. relative humidity



Selecting the humidity variable, e.g. relative humidity, % RH




Selecting the analog output type, e.g. 4 to 20 mA



Programming the analog start



Programming the analog end

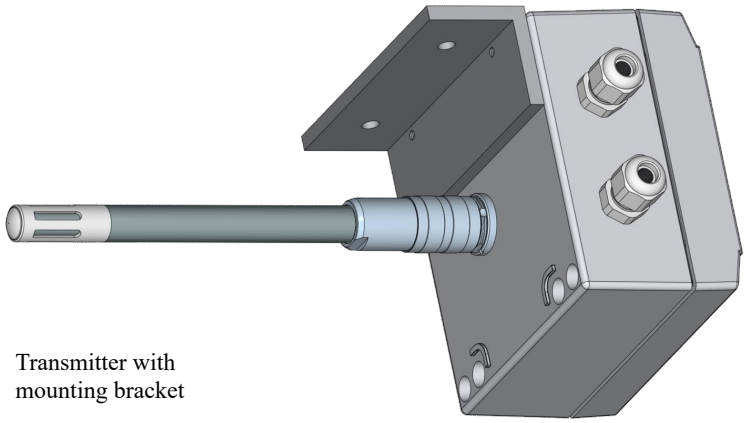

Transmitter with mounting bracket

Accessories

	Order no.
Angle bracket for wall mounting	**ZB8D00W**
Rubber gasket (mat) for mounting the housing directly on a conduit wall (immersion depth = sensor length + approx. 42 mm plug length)	**ZB8D00GD**
Movable brass screw with plastic sealing ring	**ZB9600KV20**
Connecting flange for screw connection, pitch circle diameter 38 mm	**ZB9600F20**
Protective caps	
Mains plug, 100 to 240 VAC, 12 VDC, 1.8 A	**ZB1012NA12**
Connecting cable between sensor tube and transmitter	
Length = 2 meters	**ZH9D46VK02**
Same as above Length = 5 meters	**ZH9D46VK05**
Same as above Length = 10 meters	**ZH9D46VK10**
Spare sensor, complete Sensor element inside sensor tube including protective cap SK7	
Sensor length = 125 mm	**FH9D46C1K1**
Same as above Sensor length = 265 mm	**FH9D46C1K2**
Same as above Sensor length = 525 mm	**FH9D46C1K3**
Replacement sensor element, digital, adjusted, plug-in	**FH0D46C**

Variants including manufacturer's test certificate

Order no.

Digital transmitter for temperature and humidity

with double analog output, 10 V or 20 mA (selectable via keypad), internal display, 3 keys, aluminum housing, IP65, with plug-in digital sensor, sensor length = 125 mm	**MH8D46C1K1**
Same as above Sensor length = 265 mm	**MH8D46C1K2**
Same as above Sensor length = 525 mm	**MH8D46C1K3**

DAkkS accredited calibration or factory calibration KH9xxx, temperature, humidity, for digital sensor, see chapter „Calibration certificates“.
DAkkS accredited calibration meets all the requirements regarding test resources laid down in DIN EN ISO/IEC 17025.

11/2025 • We reserve the right to make technical changes.